



2008

EXPLORING NEW FRONTIERS OF LIGHT

 **Maxxima**[®]
LED LIGHTING AND ACCESSORIES

Table of Contents

2-3	Hybrid Series
4-6	Lightning Series
7-8	White Back-Up
9-13	Stop/Tail/Turn & Park Turn
14-15	Gorilla Series
16-17	LED Warning Strobes / Flashers
18-19	Pedestal Lights
20-32	Clearance Marker
25	ID Bars
33	Bus Lights
34-35	Air Cleaner Assemblies
36-39	Auxiliary Forward / Interior Courtesy Lights
40	Electrical Connectors
41	Mounting Accessories
42-43	LED Flashlights
44-45	LED Night & Occupancy Sensor Lights
46	Maxxima Promotional Items
47	Limited Warranty Statement
48	LED / Retail Display Systems
49	Part Number Page Reference Table

The following terms have been used throughout this catalogue

STT - Stop/Tail/Turn

PCAT - Park/Clearance/Auxiliary Turn

PFT - Park/Front Turn

PRT - Park/Rear Turn

Where Quality Manufacturing Is Standard Operating Procedure

Maxxima's new product innovations and technological achievements continue to lead the commercial vehicle market.

LED lamps with extended life (100,000 hours), energy saving characteristics and intense glow combined with specially formulated proprietary lens designs has provided some of the most exciting new products in the industry. With several patents issued and pending, Maxxima will continue to revolutionize the lighting industry with superior light emission, greater visibility and elevated performance. In 2008 all Maxxima 4" products incorporate Spin Welding and all oval lamps incorporate Linear Welding techniques.

By purchasing Maxxima, you become the owner of exceptional lighting products recognized by the most reputable dealers in the world. Please examine many of the unique features outlined in this brochure. Maxxima is proud to recommend its highly qualified and professional dealer network to guide you through your product selection.

Come grow with us and be a part of history to replace Edison's century old incandescent bulb with Maxxima LED Lighting Products.

Maxxima continually strives to upgrade and improve the quality, materials, workmanship and manufacturing processes of its product line. Respectfully, specifications displayed in this brochure may be subject to change without notification. Any changes or amendments will be reflected in ensuing printings.

**ALL MAXXIMA LED VEHICLE LIGHTING
PRODUCTS ARE US FMVSS 108 US AND
CMVSS 108 CANADIAN COMPLIANT.**



ONE HOLE REALLY IS BETTER THAN TWO!



INTRODUCING THE NEW HYBRID SERIES COMBINATION LED STOP TAIL TURN / BACK-UP LIGHT.

Patented dual configuration flange mount design, delivers significant cost savings in materials and labor while reducing the total area required for Stop Tail Turn/Back-Up lighting. Available in round and oval models. All Maxxima LED lights use industry standard 2 & 3 pin connectors and are fully FMVSS 108 US & Canadian compliant.

For further information please contact Maxxima
125 Cabot Court Hauppauge, NY 11788
631/434-1200 | maxxima.com | info@maxxima.com

 **Maxxima**[®]
LED LIGHTING & ACCESSORIES



HYBRID
S E R I E S



BACK UP



STT



STT/BACK UP



4" ROUND BACK UP, STOP/TAIL/TURN & REAR TURN



BACKUP



STT



STT/BACKUP

PRODUCT SPECS

Part Number	M85429R 4" Round Red Hybrid M85429Y 4" Round Amber Hybrid
LED's	18 White, 9 Red 18 White, 15 Amber
Function	Backup, STT Red Backup, RT Amber
DOT/SAE	J1398, J585, J1395, J593
Voltage	12.8 VDC
Amp Draw	Backup 195 Milliamps STT Red 150 Milliamps RT Amber 330 Milliamps
Legal Heading	Red - R, I6S2T2, Amber - R, I6
Mounting	3 Hole Flange Mount 3/16" Dia. Hole Bolt pattern 5" Dia.
Connector	2ea PL-3



33 LED's

M85429Y



27 LED's

M85429R


- 100,000 Hour Rated LED Life
- Patent Pending Design Combines STT / RT and Back-Up Function in One Unit
- Patent Pending Lightning Designed Lens Optics
- Standard Three Hole Flange Mounting
- Maxx-Shield Protective Polymer Coating



OVAL BACK UP, STOP/TAIL/TURN & REAR TURN



27 LED's

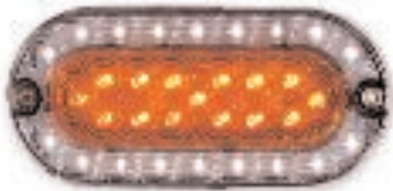

33 LED's

M85639R

M85639Y

- 100,000 Hour Rated LED Life
- Patent Pending Design Combines STT / RT and Back-Up Function in One Unit
- Patent Pending Lightning Designed Lens Optics
- Standard Two Hole Flange Mounting
- Maxx-Shield Protective Polymer Coating



BACKUP



STT



STT/BACK UP

PRODUCT SPECS

Part Number	M85639R Red Oval Hybrid M85639Y Amber Oval Hybrid
LED's	18 White, 9 Red 18 White, 15 Amber
Function	Backup, STT Red Backup, RT Amber
DOT/SAE	J1398, J585, J1395, J593
Voltage	12.8 VDC
Amp Draw	Backup 195 Milliamps STT Red 150 Milliamps RT Amber 290 Milliamps
Legal Heading	Red - R, I6S2T2, Amber - R, I6
Mounting	2 Hole Flange Mount 3/16" Dia. Hole 7 1/4" Center to Center
Connector	2ea PL-3

Lightning 4" ROUND RED STOP/TAIL/TURN



9 LED's

M42322R

- Patent Pending Lightning Designed Lens Optics
- 5 Year Maxxima Warranty
- Poly-Carbonate Lens and Housing
- Solid State Circuit Board
- Plated Brass Connector
- 100,000 Hour Rated LED Life



M42322RCL



M42323R



M42323RCL

PRODUCT SPECS

Part Number	M42322R Red M42322RCL Red Clear Lens M42323R Red Flange M42323RCL Red Clear Lens Flange
LED's	9 x 8mm Diodes
Diameter	4.25" Grommet 5.50" Flange
Depth	1.88"
DOT/SAE	J1395, J1398, J585e
Voltage	12.8 VDC
Amp Draw	140 Milliamps
Legal Heading	I6S2T2
Mounting	Grommet or Flange
Connector	PL - 3

Lightning 4" ROUND AMBER PARK/FRONT & REAR TURN



M42322YCL



15 LED's

M42322Y

PRODUCT SPECS

Part Number	M42322Y Amber M42322YCL Amber Clear Lens
LED's	15 x 8mm Diodes
Diameter	4.25" Grommet
Depth	1.88"
DOT/SAE	J1395, J222
Voltage	12.8 VDC
Amp Draw	330 Milliamps
Legal Heading	I6P
Mounting	Grommet
Connector	PL - 3

- Patent Pending Lightning Designed Lens Optics
- 5 Year Maxxima Warranty
- Poly-Carbonate Lens and Housing
- Solid State Circuit Board
- Plated Brass Connector
- 100,000 Hour Rated LED Life

Lightning OVAL RED STOP/TAIL/TURN



M63323RCL



9 LED's

M63322R

PRODUCT SPECS

Part Number	M63322R Red M63322RCL Red Clear Lens M63323R Red Flange M63323RCL Red Clear Lens Flange
LED's	9 x 8mm Diodes
Width	6.40" Grommet
Height	2.20"
Depth	1.63"
DOT/SAE	J1395, J1398, J585e
Voltage	12.8 VDC
Amp Draw	140 Milliamps
Legal Heading	I6S2T2
Mounting	Grommet or Flange
Connector	PL - 3

- Patent Pending Lightning Designed Lens Optics
- 5 Year Maxxima Warranty
- Poly-Carbonate Lens and Housing
- Solid State Circuit Board
- Plated Brass Connector
- 100,000 Hour Rated LED Life

Lightning OVAL AMBER PARK/FRONT & REAR TURN



M63322YCL



M63322Y

PRODUCT SPECS

Part Number	M63322Y Amber M63322YCL Amber Clear Lens M63323Y Amber Flange M63323YCL Amber Clear Lens Flange
LED's	15 x 8mm Diodes
Width	6.40" Grommet
Height	2.20"
Depth	1.63"
DOT/SAE	J1395, J1398, J585e, J222
Voltage	12.8 VDC
Amp Draw	310 Milliamps
Legal Heading	I6P
Mounting	Grommet
Connector	PL - 3

- Patent Pending Lightning Designed Lens Optics
- 5 Year Maxxima Warranty
- Poly-Carbonate Lens and Housing
- Solid State Circuit Board
- Plated Brass Connector
- 100,000 Hour Rated LED Life

Lightning 4" ROUND BACK UP LIGHT



M42324

18 LED's

- 100,000 Hour Rated LED Life
- Poly-Carbonate Lens and Housing
- Patent Pending Lightning Designed Lens Optics
- 3 Hole Flange or Grommet Mount



M42326

PRODUCT SPECS

Part Number	M42324 Grommet M42326 Flange
LED's	18 x 5mm Diodes
Diameter	4.00"
Depth	1.75"
DOT/SAE	J593c
Voltage	12.8 VDC
Amp Draw	160 Milliamps
Legal Heading	R
Mounting	Grommet Flange 5/32 Dia. Holes Bolt Pattern 5" Dia.
Connector	PL - 3

Lightning OVAL BACK UP LIGHT



M63325

PRODUCT SPECS

Part Number	M63324 Grommet M63325 Flange
LED's	18 x 5mm Diodes
Width:	6.4"
Height	2.2"
Depth:	1.6"
DOT/SAE	J593c
Voltage	12.8 VDC
Amp Draw	160 Milliamps
Legal Heading	R
Mounting	Grommet Flange 5/16" Dia. Holes 7 1/4" Center to Center
Connector	PL - 3



18 LED's

M63324

- 100,000 Hour Rated LED Life
- Poly-Carbonate Lens and Housing
- Patent Pending Lightning Designed Lens Optics
- 2 Hole Flange or Grommet Mount

4" ROUND WHITE BACK-UP LIGHTS

PRODUCT SPECS

Part Number	M42400 White Flange M42450 White Grommet
LED's	54 x 5mm Diodes
Diameter	4.25"
Diameter	5.50"
Depth	1.87"
DOT/SAE	J593c
Voltage	12.8 VDC
Amp Draw	400 Milliamps
Legal Heading	R
Mounting	Grommet or Flange
Connector	PL - 3



M42450




54 LED's

M42400

- Smart Chip Surge Protection
- 100,000 Hour Rated LED Life
- Plated Brass Connector
- Maxx-Shield Protective Polymer Coating
- 3 Hole Flange or Grommet Mount
- Poly-Carbonate Lens and Housing



4" ROUND WHITE BACK-UP LIGHTS



M42327

30 LED's

- Smart Chip Surge Protection
- 100,000 Hour Rated LED Life
- Plated Brass Connector
- Maxx-Shield Protective Polymer Coating
- 3 Hole Flange or Grommet Mount
- Poly-Carbonate Lens and Housing



M42325



PRODUCT SPECS

Part Number	M42327 White Flange M42325 White Grommet
LED's	30 x 5mm Diodes
Diameter	4.25" Grommet
Diameter	5.50" Flange
Depth	1.92"
DOT/SAE	J593c
Voltage	12.8 VDC
Amp Draw	300 Milliamps
Legal Heading	R
Mounting	Grommet or Flange
Connector	PL - 3

OVAL WHITE BACK-UP LIGHT

PRODUCT SPECS

Part Number	M63150 White
LED's	45 x 5mm Diodes
Width	6.4"
Height	2.2"
Depth	1.6"
DOT/SAE	J593c
Voltage	12.8 VDC
Amp Draw	410 Milliamps
Legal Heading	R
Mounting	Grommet
Connector	PL - 3



45 LED's

M63150

- Smart Chip Surge Protection
- 100,000 Hour Rated LED Life
- Plated Brass Connector
- Maxx-Shield Protective Polymer Coating
- Epoxy Resin Sealed
- Poly-Carbonate Lens and Housing



5" RECTANGULAR BACK UP LIGHT



20 LED's

M42211

- Poly-Carbonate Lens and Housing
- Plated Brass Connector
- Epoxy Resin Sealed Electronics
- 100,000 Hour Rated LED Life

PRODUCT SPECS

Part Number	M42211 White Back Up
LED's	20 x 5mm Diodes
Width	5.25"
Height	3.38
Depth	1.88"
DOT/SAE	J593c
Voltage	12.8 VDC
Amp Draw	250 Milliamps
Legal Heading	R
Mounting	Grommet

RECTANGULAR SURFACE MOUNT BACK-UP LIGHT

PRODUCT SPECS

Part Number	M42205 White Back Up
LED's	20 x 5mm Diodes
Width	4.56"
Height	2.44"
Depth	1.00"
DOT/SAE	J593c
Voltage	12.8 VDC
Amp Draw	250 Milliamps
Legal Heading	R
Mounting	Surface
Connector	Wire Leads



20 LED's

M42205

- 2 Hole Surface Mount
- 2 Blunt Cut 9" Leads
- Poly-Carbonate Lens and Housing
- Solid State Circuit Board
- Moisture, Corrosion and Vibration Proof
- 100,000 Hour Rated LED Life

7" WHITE BACK-UP LIGHT



20 LED's

M90450

- Surface Mount with Standard 4 Hole Pattern
- Mounting Gasket Included
- Sealed Electronics are Moisture, Corrosion and Vibration Proof
- 100,000 Hour Rated LED Life
- Maxx-Shield Protective Polymer Coating
- Poly-Carbonate Lens and Housing

PRODUCT SPECS

Part Number	M90450 White
LED's	20 x 5mm Diodes
Diameter	7.00"
Depth	1.36"
DOT/SAE	J593c
Voltage	12.8 VDC
Amp Draw	250 Milliamps
Legal Heading	R
Mounting	Surface
Connector	Wire Leads

4" ROUND STOP/TAIL/TURN



M42120R



44 LED's

M42100R

PRODUCT SPECS

Part Number	M42100R Red STT Grommet M42120R Red STT Flange
LED's	44 x WSI 5mm Diodes Red
Diameter	4.25"
Depth	2.0"
DOT/SAE	J1395, J1398, J585e
Voltage	12.8 VDC
Amp Draw	300 Milliamps Red
Legal Heading	I6S2T2 Red
Mounting	Flange or Grommet 13/64" Dia. Holes Bolt Patterns 5" Dia.
Connector	PL - 3

- WSI - Wide Spectrum Illumination 5mm LED's
- Poly-Carbonate Lens & Housing Spin Welded
- Plated Brass Connector
- 100,000 Hour Rated LED Life
- HVTC High Voltage Tolerance Circuitry

4" ROUND PARK/REAR TURN



48 LED's

M42100Y

- WSI - Wide Spectrum Illumination 5mm LED's
- High Impact Poly-Carbonate Lens and Housing
- Plated Brass Connector
- 100,000 Hour Rated LED Life
- HVTC High Voltage Tolerance Circuitry

PRODUCT SPECS

Part Number	M42100Y Amber PRT
LED's	48 x WSI 5mm Diodes Amber
Diameter	4.25"
Depth	2.0"
DOT/SAE	J1395, J222
Voltage	12.8 VDC
Amp Draw	350 Milliamps
Legal Heading	I6P Amber
Mounting	Grommet
Connector	PL - 3

VANTAGE 4" ROUND STOP/TAIL/TURN



32 LED's

M42320R

- 5 Year Warranty
- Superior Optics and Lens Design for Off-Axis Visibility
- Poly-Carbonate Lens and Housing Spin Welded
- Plated Brass Connector
- Spin Welded Lens and Housing
- HVTC High Voltage Tolerance Circuitry

PRODUCT SPECS

Part Number	M42320R Red STT
LED's	32 x WSI 5mm Diodes
Diameter	4.25"
Depth	2.0"
DOT/SAE	J1395, J1398, J585e
Voltage	12.8 VDC
Amp Draw	250 Milliamps
Legal Heading	I6S2T2
Mounting	Grommet
Connector	PL - 3

4" ROUND STOP/TAIL/TURN



56 LED's

M56100R

PRODUCT SPECS

Part Number	M56100R Red STT
LED's	56 x WSI 5mm Diodes
Diameter	4.25"
Depth	2.0"
DOT/SAE	J1395, J1398, J585e
Voltage	12.8 VDC
Amp Draw	440 Milliamps
Legal Heading	I6S2T2
Mounting	Grommet
Connector	PL - 3

- WSI - Wide Spectrum Illumination 5mm LED's for Better Visibility
- Poly-Carbonate Lens & Housing
- Plated Brass Connector
- Sealed Electronics are Moisture, Corrosion and Vibration Proof
- 100,000 Hour Rated LED Life
- HVTC High Voltage Tolerance Circuitry
- Maxx-Shield Protective Polymer Coating

THREE STUD LED BOX STYLE MULTI-FUNCTION

PRODUCT SPECS

Part Number	M42220
LED's	16 x 8mm Red 22 x 5mm White
Width	5.75"
Height	6.75"
Depth	3.25"
DOT/SAE	J594, J1395, J1398, J585e, J593c
Voltage	12.8 VDC
Amp Draw	Backup 260 Milliamps Stop 220 Milliamps
Legal Heading	AIRST
Mounting	Three Stud
Connector	3 Leads



16 RED, 22 WHITE LED's

M42220

- 5 Year Warranty
- 100,000 Hour Rated LED Life
- Poly-Carbonate Lens and Housing
- Built In Reflector
- Universal Design
- 3 Blunt Cut Wire Leads

OVAL AMBER SIDE TURN/SIDE MARKER



18 LED's

M63120Y

- 100,000 Hour Rated LED Life
- Poly-Carbonate Lens and Housing
- Sealed Electronics
- Smart Chip Protection
- Maxx-Shield Protective Polymer Coating

PRODUCT SPECS

Part Number	M63120Y
LED's	18 x 5mm Diodes
Width	6.41"
Height	2.2"
Depth	2.05"
SAE	J2039, J592
Voltage	12.8 VDC
Amp Draw	450 Milliamps
Legal Heading	EP2
Mounting	Grommet
Connector	PL - 3



6" OVAL STOP/TAIL/TURN & PARK/CLEARANCE/AUXILIARY TURN



M63100Y

60 LED's

M63100R

- Poly-Carbonate Lens and Housing
- Plated Brass Connector
- Epoxy Sealed Electronics
- 100,000 Hour Rated LED Life
- Smart Chip Surge Protection
- Maxx-Shield Protective Polymer Coating

PRODUCT SPECS

Part Number	M63100R Red STT *M63100Y Amber PCAT
LED's	60 x 5mm Diodes
Width	6.40"
Height	2.2"
Depth	1.6"
DOT/SAE	J1395, J1398, J585e
Voltage	12.8 VDC
Amp Draw	430 Milliamps Red 400 Milliamps Amber
Legal Heading	I6S2T2 Red PP2 Amber
Mounting Connector	Grommet PL - 3



VANTAGE 6" OVAL STOP/TAIL/TURN & PARK/CLEARANCE/AUXILIARY TURN



42 LED's

M63420R

M63420Y

PRODUCT SPECS

Part Number	M63420R Red STT *M63420Y Amber PCAT
LED's	42 x 5mm Diodes
Width	6.40"
Height	2.2"
Depth	1.6"
DOT/SAE	J1395, J1398, J585e
Voltage	12.8 VDC
Amp Draw	350 Milliamps
Legal Heading	I6S2T2 Red PP2 Amber
Mounting Connector	Grommet PL - 3



- 5 Year Warranty
- Poly-Carbonate Lens and Housing
- Plated Brass Connector
- Sealed Electronics are Moisture, Corrosion and Vibration Proof
- 100,000 Hour Rated LED Life
- Smart Chip Surge Protection

5" RECTANGULAR STOP/TAIL/TURN & PARK/FRONT TURN LIGHTS



M42201R



44 LED's

M42201Y

PRODUCT SPECS

Part Number	M42201R Red STT M42201Y Amber Park Front Turn
LED's	44 x 5mm Diodes
Width	5.3"
Height	3.4"
Depth	1.8"
DOT/SAE	J1395, J1398, J585e, J222
Voltage	12.8 VDC
Amp Draw	Red 310 Milliamps Amber 370 Milliamps
Legal Heading	Red I6S2T2 Amber I6P
Mounting Connector	Grommet PL - 3

- Poly-Carbonate Lens & Housing
- Plated Brass Connector
- Sealed Electronics are Moisture, Corrosion and Vibration Proof
- 100,000 Hour Rated LED Life

RECTANGULAR SURFACE MOUNT STOP/TAIL/TURN & PARK/FRONT TURN



17 LED's

M42205Y

- 2 Hole Surface Mount
- Poly-Carbonate Lens and Housing
- Solid State Circuit Board
- 3 Blunt Cut 6" Leads
- Sealed Electronics are Moisture, Corrosion and Vibration Proof
- 100,000 Hour Rated LED Life



10 LED's

M42205R

PRODUCT SPECS

Part Number	M42205R Red STT M42205Y Amber PFT
LED's	10 x 8mm Diodes Red
LED's	17 x 8mm Diodes Amber
Width	4.56"
Height	2.44"
Depth	1.0"
DOT/SAE	J1395, J1398, J585e, J222
Voltage	12.8 VDC
Amp Draw	Red 200 Milliamps Amber 250 Milliamps
Legal Heading	IST Red I6P Amber
Mounting Connector	Surface Straight Leads

4" ROUND GORILLA STT & PARK REAR TURN



40 LED's

M42500Y

- 5 Year Off-Road Warranty
- Smart Chip Surge Protection
- Extra Thick Solid State Circuit Board
- Moisture, Vibration and Corrosion Proof
- 100,000 Hour Rated LED Life



M42500R

PRODUCT SPECS

Part Number	M42500R Red STT M42500Y Amber PRT
LED's	40 x 5mm Diodes
Diameter	4.3"
Depth	2.1"
DOT/SAE	J1395, J1398, J585e, J222
Voltage	12.8 VDC
Amp Draw	Red 300 Milliamps Amber 200 Milliamps
Legal Heading	I6S2T2 Red P16 Amber
Mounting Connector	Grommet PL - 3



OVAL GORILLA STT & PARK/CLEARANCE/AUXILIARY TURN



M63450Y

PRODUCT SPECS

Part Number	M63450R Red STT *M63450Y Amber PCAT
LED's	42 x 5mm Diodes
Width	6.4"
Height	2.3"
Depth	2.1"
DOT/SAE	J1395, J1398, J585e, J222, J592e
Voltage	12.8 VDC
Amp Draw	250 Milliamps
Legal Heading	I6S2T2 Red PP2P3 Amber
Mounting Connector	Grommet PL - 3



42 LED's

M63450R

- 5 Year Off-Road Warranty
- Smart Chip Surge Protection
- Extra Thick Solid State Circuit Board
- Moisture, Vibration and Corrosion Proof
- 100,000 Hour Rated LED Life

2" ROUND GORILLA CLEARANCE MARKERS



M34100R



M34100Y

9 LED's

PRODUCT SPECS

Part Number	M34100R Red M34100Y Amber
LED's	9 x 5mm Diodes
Diameter	2"
Depth	0.7"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	50 Milliamps
Legal Heading	P2
Mounting	Grommet
Connector	PL - 2

- 5 Year Off-Road Warranty
- Extra Thick Solid State Circuit Board
- Moisture, Vibration and Corrosion Proof
- 100,000 Hour Rated LED Life

2 1/2" ROUND GORILLA CLEARANCE MARKER



M16100R

12 LED's



M16100Y

PRODUCT SPECS

Part Number	M16100R Red M16100Y Amber
LED's	12 x 5mm Diodes
Diameter	2.5"
Depth	0.7"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	60 Milliamps
Legal Heading	P2
Mounting	Grommet
Connector	PL - 2

- 5 Year Off-Road Warranty
- Extra Thick Solid State Circuit Board
- Moisture, Vibration and Corrosion Proof
- 100,000 Hour Rated LED Life

4" ROUND LED WARNING STROBES



M42700R



M42700Y

32 LED's

- Multi-Function Strobes
- Strobes can be synchronized or alternating pattern
- Three Selectable Flash Patterns
- Dual, Quad, Split Flash
- Meets SAE J845
- Smart Chip Surge Protection
- Moisture, Vibration and Corrosion Proof
- 100,000 Hour Rated LED Life

PRODUCT SPECS

Part Number	M42700R Red M42700Y Amber
LED's	32 x 5mm Diodes
Diameter	4.25"
Depth	2.40"
Voltage	12.8 VDC
Amp Draw	200 Milliamps
Legal Heading	SAE W3-2(36)
Mounting	Grommet
Connector	PL - 3



OVAL LED WARNING STROBES



M63200Y



32 LED's

M63200R

PRODUCT SPECS

Part Number	M63200R Red M63200Y Amber
LED's	32 x 5mm Diodes
Width	6.2
Height	2.18"
Depth	1.62"
Voltage	12.8 VDC
Amp Draw	200 Milliamps
Legal Heading	SAE W3-2(40)
Mounting	Grommet
Connector	PL - 3

- Multi-Function Strobes: Sync or Alternating
- Three Selectable Flash Patterns
- Dual, Quad, Split Flash
- Meets SAE J845
- Smart Chip Surge Protection
- Moisture, Vibration and Corrosion Proof
- 100,000 Hour Rated LED Life



SURFACE MOUNT WARNING STROBES



M20370RCL



M20370YCL

3 LED's

- 11 Selectable Flash Patterns
- Clear Lens
- 5 Year Maxxima Warranty
- 100,000 Hour LED Rated
- Poly-Carbonate Lens, aluminum die-cast housing

PRODUCT SPECS

Part Number	M20370RCL Red M20370YCL Amber M20370WCL White M20370BCL Blue
LED's	3 x Power LED
Width	3.6"
Height	1.3"
Depth	1.2"

RECTANGULAR LED WARNING STROBES

PRODUCT SPECS

Part Number	M42210R Red M42210Y Amber
LED's	52 x 5mm Diodes
Width	5.25"
Height	3.38"
Depth	1.96"
Voltage	12.8 VDC
Amp Draw	280 Milliamps
Legal Heading	SAE W3-2(40)
Mounting	Grommet
Connector	PL - 3



M42210Y




M42210R

52 LED's

- Two Selectable Flash Patterns, Dual & Quad Flash
- Meets SAE J845
- Moisture, Vibration and Corrosion Proof
- 100,000 Hour Rated LED Life


LED EMERGENCY FLASHERS



SDL-50



SDL-52



SDL-53

18 LED's

- LED Lamp Visible up to 1-1/4 Miles (2000 Meters)
- 3 Functions: Steady, Flash, & Split Flash
- Strong Magnets Instantly Attach to Stationary Vehicle Only
- Built-In Stand for Vertical or Horizontal Mounting
- Weather Resistant
- Operates 72 Hours on 4AA Batteries - Not Included

PRODUCT SPECS

Part Number	SDL-50 Amber SDL-52 Red SDL-53 Blue
LED's	18 x 5mm Diodes
Width	6.25"
Height	3.6"
Depth	1.6"

5" BEACON WARNING STROBES

PRODUCT SPECS

Part Number	M42705Y Amber
LED's	3 x Power LED
Height	5"
Depth	2.3"
Voltage	12.8 VDC
Amp Draw	240 Milliamps
Mounting	2 Hole
Connector	2 Blunt Cut Leads



3 LED's

M422705Y

- Surface Mount
- 5 Year Maxxima Warranty
- 100,000 Hour LED Rated
- Poly-Carbonate Lens, Base & Housing

LED EMERGENCY WARNING BANNERS



SDL-30



SDL-33

- Measures 16" x 26"
- Waterproof
- Operates 145 Hours on 2AA Batteries (not included)
- Moisture, Vibration and Corrosion Proof
- 100,000 Hour Rated LED Life

PRODUCT SPECS

Part Number	SDL-30 Red SDL-33 Amber
LED's	15 5mm Diodes
Width	26"
Height	16"
Voltage	3.0 VDC
Mounting	Magnets & Grommets

SQUARE CHROME RED/AMBER DOUBLE FACE PEDESTAL LIGHTS



M42330R/Y



M42331R/Y

36 LED's



M42332R/Y



M42332RYCL



M42333R/Y

PRODUCT SPECS

Part Number	M42330R/Y Single Post Left Hand M42331R/Y Single Post Right Hand M42332R/Y Double Post Left Hand M42333R/Y Double Post Right Hand M42332RYCL Double Post Left Hand Clear Lens M42333RYCL Double Post Right Hand Clear Lens
LED's	36 x 8mm Diodes
Function	STT Red, PFT Amber, Side Marker Amber
Width	4.65"
Height	4.65"
Depth	2.47"
DOT/SAE	J1395, J1398, J585e, J594f
Voltage	12.8 VDC
Amp Draw	600 Milliamps
Legal Heading	ISTP/AP2
Mounting	Post

- 5 Year Warranty
- Poly-Carbonate Lens & Housing
- Available In Single or Double Post
- Left and Right Hand Versions
- Three Wire Connection
- Epoxy Sealed Electronics are Moisture, Corrosion and Vibration Proof
- 100,000 Hour Rated LED Life
- Side Marker Reflex Reflector

CHROME ROUND RED/AMBER DOUBLE FACE PEDESTAL LIGHTS



M42328RYCL



40 LED's

M42328R/Y

PRODUCT SPECS

Part Number	M42328R/Y Red/Amber M42328RYCL Red/Amber Clear Lens
LED's	20 x 8mm Diodes Red 20 x 8mm Diodes Amber
Function	STT PFT
DOT/SAE	J1395, J1398, J585e, J222
Voltage	12.8 VDC
Amp Draw	600 Milliamps
Legal Heading	I6PS2T2
Mounting	Hole 9/16"

- 5 Year Warranty
- 100,000 Hour Rated LED Life
- Chrome Polished Housing
- Poly-Carbonate Lens
- Single Pedestal Mount
- Three Wire Connection

CHROME ROUND RED or AMBER SINGLE FACE PEDESTAL LIGHTS



20 LED's

M42328Y



M42328R

PRODUCT SPECS

Part Number	M42328R Red M42328Y Amber
LED's	20 x 8mm Diodes
Function	STT Red PFT Amber
DOT/SAE	J1395, J1398, J585e, J222
Voltage	12.8 VDC
Amp Draw	200 Milliamps Red 180 Milliamps Amber
Legal Heading	Red I6S2T2 Amber I6P
Mounting	9/16" Dia

- 5 Year Warranty
- 100,000 Hour Rated LED Life
- Chrome Polished Housing
- Poly-Carbonate Lens
- Single Pedestal Mount
- Three Wire Connection

6" CLEARANCE MARKER



M20332RCL

12 LED's

- Stainless Steel Bezel
- Completely Sealed Electronics
- Solid State Circuit Boards
- 100,000 Hour Rated LED Life



M20332Y



M20332R



M20332YCL

PRODUCT SPECS

Part Number	M20332R Red M20332Y Amber M20332RCL Red Clear Lens M20332YCL Amber Clear Lens
LED's	12 x 5mm Diodes
Width	6.19"
Height	2.0"
Depth	.94"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	60 Milliamps
Legal Heading	P2
Mounting	Surface
Connector	Bullet & Ring

"PETE" LIGHT - CLEARANCE MARKER



M27005YCL



M27005RCL



M27005Y

U.S. Patent No. D527837



M27005R

15 LED's

- Easy Snap On Stainless Steel Bezel Conceals Mountin Screws
- Perfect for Cab or Sleeper Panels
- Completely Sealed Electronics
- Plated Brass Connector
- 100,000 Hour Rated LED Life

PRODUCT SPECS

Part Number	M27005R Red M27005Y Amber M27005RCL Red Clear Lens M27005YCL Amber Clear Lens
LED's	15 x 5mm Diodes
Width	5.9"
Height	2.15"
Depth	0.9"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	60 Milliamps
Legal Heading	P2
Mounting	Surface
Connector	PL - 2

NEW MODERN LENS DESIGN

CHROME OVAL CLEARANCE MARKER

U.S. Patent No. D514008



M72270RCL



M72270YCL



M72270R



M72270Y

13 LED's

PRODUCT SPECS

Part Number	M72270R Red M72270Y Amber M72270YCL Amber Clear Lens M72270RCL Red Clear Lens
Led's	13x 5mm Diodes
Width	6.63"
Height	2"
Depth	.75"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	60 Milliamps
Legal Heading	P2
Mounting	Surface
Connector	PL - 2

- Easy Snap-On Stainless Steel Bezel
Conceals Mounting Screws
- Ideal for Cab and Sleeper Panels
- 100,000 Hour Rated LED Life

MINI-CHROME OVAL CLEARANCE MARKER

U.S. Patent No. D514008



M36180R

7 LED's



M36180RCL



M36180Y



M36180YCL

PRODUCT SPECS

Part Number	M36180R Red M36180Y Amber M36180YCL Amber Clear Lens M36180RCL Red Clear Lens
LED's	7 x 5mm Diodes
Width	3"
Height	2"
Depth	.63"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	40 Milliamps
Legal Heading	P2
Mounting	Surface
Connector	PL - 2

- Easy Snap-On Stainless Steel Bezel
- Ideal for use in Cab and Air Cleaner Panels
- 100,000 Hour Rated LED Life

2" X 6" COMBINATION CLEARANCE MARKER

U.S. Patent No. 7,273,306 B2



M20395R

18 LED's

M20395Y

- P2PC Combination Clearance Marker
- Poly-Carbonate Lens
- Plated Brass Connector
- 100,000 Hour Rated LED Life

PRODUCT SPECS

Part Number	M20395R Red M20395Y Amber
LED's	18 x 5mm Diodes
Width	5.9"
Height	2"
Depth	1.8"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	80 Milliamps
Legal Heading	P2PC
Mounting	Surface 4.81" Hole Centers
Connector	PL - 2

NEW MODERN
LENS DESIGN

2" X 6" REFLECTORIZED COMBINATION CLEARANCE MARKER

U.S. Patent No. 7,273,306 B2



M20391R



PRODUCT SPECS

Part Number	M20391R Red M20391Y Amber
LED's	7 x 5mm Diodes
Width	5.9"
Height	2"
Depth	1.8"
DOT/SAE	J592e, J594f
Voltage	12.8 VDC
Amp Draw	40 Milliamps
Legal Heading	AP2PC
Mounting	Surface 4.81" Hole Centers
Connector	PL - 2

7 LED's

M20391Y

- P2PC Combination Clearance Marker
- Modern Reflector Lens Design
- Poly-Carbonate Lens
- Plated Brass Connector
- 100,000 Hour Rated LED Life

2" X 6" REFLECTORIZED CLEARANCE MARKER

PRODUCT SPECS

Part Number	M20330R Red M20330Y Amber
LED's	8 x 5mm Diodes
Width	5.9"
Height	2.1"
Depth	1.57"
DOT/SAE	J592e, J594f
Voltage	12.8 VDC
Amp Draw	40 Milliamps
Legal Heading	AP2
Mounting	Surface 4.8" Hole Centers
Connector	Bullet & Ring



M20330R



8 LED's

M20330Y

- Poly-Carbonate Reflector Lens
- 100,000 Hour Rated LED Life

FLUSH MOUNT CAB MARKER



6 LED's

M20361Y

- Designed for Flush Mounting
- Poly-Carbonate Lens and Housing
- Includes Neoprene Gasket
- Completely Sealed
- *For Freightliner/Volvo
- 100,000 Hour Rated LED Life



M20361R



M20361YCL



M20361RCL

PRODUCT SPECS

Part Number	M20361Y Amber M20361R Red M20361YCL Amber Clear M20361RCL Red Clear	Depth	1.19"
LED's	6 x 8mm Diodes	DOT/SAE	J592e
Width	4.57"	Voltage	12.8 VDC
Height	2.25"	Amp Draw	90 Milliamps
		Legal Heading	P2
		Mounting	Flush
		Connector	PL - 2 (Included)

RECTANGULAR CLEARANCE MARKER

PRODUCT SPECS

Part Number	M20321R Red M20321Y Amber
LED's	6 x 5mm Diodes
Width	3.75"
Height	2.5"
Depth	1.0"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	40 Milliamps
Legal Heading	P2
Mounting	Surface
Connector	2 Leads



M20321R




6 LED's

M20321Y

- Designed for Flush Mounting
- Poly-Carbonate Lens and Housing
- Includes Rubber Gasket
- Completely Sealed
- 100,000 Hour Rated LED Life

* Freightliner/Volvo are Registered Trademarks

2 1/2" RECTANGULAR CLEARANCE MARKER

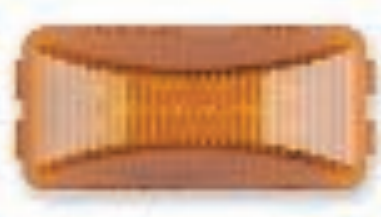

8 LED's

M20320Y

M20320R

- Plugs into Existing Mounting Base
- 100,000 Hour Rated LED Life

PRODUCT SPECS

Part Number	M20320R Red M20320Y Amber M20325 Chrome Base Only Single Lead M20326 Black Base Only Single Lead M20327 Black Base Only Twin Lead M20328 Chrome Base Only Twin Lead
LED's	8 x 5mm Diodes
Width	2.57"
Height	1.25"
Depth	1.00"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	40 Milliamps
Legal Heading	P2
Mounting	Base

4" RECTANGULAR CLEARANCE MARKER

PRODUCT SPECS

Part Number	M20350R Red M20350Y Amber M20350RCL Red Clear Lens M20350YCL Amber Clear Lens M20355 Chrome Base Only Single Lead M20356 Black Base Only Single Lead M20357 Black Base Only Twin Lead M20358 Chrome Base Only Twin Lead
LED's	12 x 5mm Diodes
Width	4.07"
Height	1.19"
Depth	1.2"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	50 Milliamps
Legal Heading	P2
Mounting	Base



12 LED's

M20350R

M20350YCL

- Plugs into Existing Mounting Base
- 100,000 Hour Rated LED Life

4" X 3/4" CLEARANCE MARKER



M20340R

M20340YCL

M20340Y

7 LED's

M20340RCL

- Thin-Line Design Fits Rails
- Poly-Carbonate Lens and Housing
- Standard 3" Mounting Holes
- 100,000 Hour Rated LED Life

PRODUCT SPECS

Part Number	M20340R Red M20340Y Amber M20340RCL Red Clear Lens M20340YCL Amber Clear Lens	Depth	1.4"
LED's	7 x 5mm Diodes	DOT/SAE	J592e
Width	4"	Voltage	12.8 VDC
Height	0.75"	Amp Draw	40 Milliamps
		Legal Heading	P2
		Mounting	Surface
		Connector	Bullet & Ring

STAINLESS STEEL ID BAR WITH 3 X M20320R

PRODUCT SPECS

Part Number	M20323R Red
LED's	24 x 5mm Diodes
Width	16.25"
Height	1.38"
Voltage	12.8 VDC
Amp Draw	120 Milliamps
Mounting	Surface
	15.875" Center to Center
Connector	12" Leads



24 LED's

M20323R

- 2-Hole Surface Mount
- 100,000 Hour Rated LED Life
- Display Packaging

ALUMINUM ID BAR WITH 3 X M20340R/M20340RCL/M20343Y



21 LED's

M20343RCL

- 2-Hole Surface Mount
- 100,000 Hour Rated LED Life
- Display Packaging



M20343R

PRODUCT SPECS

Part Number	M20343R Red M20343RCL Red Clear Lens M20343Y Amber
LED's	21 x 5mm Diodes
Width	17.13"
Height	1"
Voltage	12.8 VDC
Amp Draw	120 Milliamps
Mounting	Surface
	16.5" Center to Center
Connector	Bullet and Ring

STAINLESS STEEL TOW HITCH ID BAR WITH 5 X M23015R

PRODUCT SPECS

Part Number	M23015R-5 Red
LED's	70 x 5mm Diodes
Width	30"
Height	2.07"
Voltage	12.8 VDC
Amp Draw	550 Milliamps
Mounting	2" Hitch
Connector	Bullet and Ring



70 LED's

M23015R-5

- Fits Standard 2" Hitch Receiver
- Locking Pin Included
- 100,000 Hour Rated LED Life
- One Year Warranty

4" COMBINATION CLEARANCE MARKER



14 LED's

M23015Y

- P2PC Combination Clearance Marker
- One Piece Sealed Unit
- Fits Standard 3" Mounting Holes
- 100,000 Hour Rated LED Life



M23015R



M23015YCL



M23015RCL

PRODUCT SPECS

Part Number	M23015R Red M23015Y Amber M23015RCL Red Clear Lens M23015YCL Amber Clear Lens
LED's	14 x 5mm Diodes
Width	4.00"
Height	2.00"
Depth	1.0"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	110 Milliamps
Legal Heading	P2PC
Mounting	Surface
Connector	Bullet & Ring

2 1/2" ROUND COMBINATION MARKER



M11260R



7 LED's

M11260Y

PRODUCT SPECS

Part Number	M11260R Red M11260Y Amber
LED's	7 x 8mm Diodes
Diameter	2.50"
Depth	.88"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	100 Milliamps
Legal Heading	P2PC
Mounting	Grommet
Connector	PL - 2

- Poly-Carbonate Lens and Housing
- Meets P2PC Requirements
- 100,000 Hour Rated LED Life
- Fits Standard Mounting Holes, Grommets and Connectors
- Epoxy Sealed Electronics

2" ROUND CLEARANCE MARKER



M09250YCL-X



M09250RCL-X



M09250Y-X

U.S. Patent No. 7,273,306 B2



5 LED's

M09250R-X

PRODUCT SPECS

Part Number	M09250R-X Red M09250Y-X Amber M09250RCL-X Amber Clear Lens M09250YCL-X Red Clear Lens
LED's	5 x 5mm Diodes
Diameter	2"
Depth	.75"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	40 Milliamps
Legal Heading	P2
Mounting	Grommet
Connector	PL - 2



- Poly-Carbonate Lens
- Plated Brass Connector
- 100,000 Hour Rated LED Life
- Fits Standard Mounting Holes, Grommets and Connectors

2 1/2" ROUND CLEARANCE MARKER

U.S. Patent No. 7,273,306 B2



7 LED's

M11350R-X

- Poly-Carbonate Lens
- Plated Brass Connector
- 100,000 Hour Rated LED Life
- Fits Standard Mounting Holes, Grommets and Connectors



M11350YCL-X



M11350RCL-X



M11350Y-X

PRODUCT SPECS

Part Number	M11350R-X Red M11350Y-X Amber M11350RCL-X Red Clear Lens M11350YCL-X Amber Clear Lens
LED's	7 x 5mm Diodes
Diameter	2.5"
Depth	.75"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	40 Milliamps
Legal Heading	P2
Mounting	Grommet
Connector	PL - 2



2" ROUND CLEARANCE MARKER



9 LED's

M09100RCL

- 100,000 Hour Rated LED Life
- Poly-Carbonate Lens and Housing
- Fits Standard Mounting Holes, Grommets and Connectors



M09100Y



M09100R



M09100YCL

PRODUCT SPECS

Part Number	M09100R Red M09100Y Amber M09100RCL Red Clear Lens M09100YCL Amber Clear Lens
LED's	9 x 5mm Diodes
Diameter	2.00"
Depth	.69"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	60 Milliamps
Legal Heading	P2
Mounting	Grommet
Connector	PL - 2

2 1/2" ROUND CLEARANCE MARKER



M11300Y



M11300RCL



M11300YCL



13 LED's

M11300R

PRODUCT SPECS

Part Number	M11300R Red M11300Y Amber M11300RCL Red Clear Lens M11300YCL Amber Clear Lens
LED's	13 x 5mm Diodes
Diameter	2.50"
Depth	.69"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	100 Milliamps
Legal Heading	P2
Mounting	Grommet
Connector	PL - 2

- 100,000 Hour Rated LED Life
- Poly-Carbonate Lens and Housing
- Fits Standard Mounting Holes, Grommets and Connectors

2 1/2" ROUND REFLECTOR CLEARANCE MARKER



M11256Y



M11256R

1 LED

PRODUCT SPECS

Part Number	M11256R Red M11256Y Amber
LED	1 x 8mm Diode
Diameter	2.50"
Depth	.69"
DOT/SAE	J592e, J594f
Voltage	12.8 VDC
Amp Draw	60 Milliamps
Legal Heading	A P2
Mounting	Grommet
Connector	PL - 2

- Reflectorized Lens
- Sealed Electronics
- Fits Standard Mounting Holes, Grommets and Connectors
- 100,000 Hour Rated LED Life
- Epoxy Sealed Electronics

BUS CLEARANCE MARKER



M27340R

12 LED's

- Poly-Carbonate Lens
- Epoxy Resin Sealed Electronics are Moisture, and Vibration Proof
- 100,000 Hour Rated LED Life



M27340Y

PRODUCT SPECS

Part Number	M27340R Red M27340Y Amber
LED's	12 x 5mm Diodes
Width	5.2"
Height	2.13"
Depth	1.38"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	Red 80 Milliamps Amber 60 Milliamps
Legal Heading	P2
Mounting	Surface - 2 Holes
Connector	2 Leads

2" BEEHIVE CLEARANCE MARKER



M09105R

9 LED's

- 100,000 Hour Rated LED Life
- Poly-Carbonate Lens and Housing
- Fits Standard Mounting Holes, Grommets and Connectors



M09105Y

PRODUCT SPECS

Part Number	M09105R Red M09105Y Amber
LED's	9 x 5mm Diodes
Diameter	2.00"
Depth	1.75"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	60 Milliamps
Legal Heading	P2
Mounting	Grommet
Connector	PL - 2

2 1/2" BEEHIVE CLEARANCE MARKER



M11201R

PRODUCT SPECS

Part Number	M11201R Red M11201Y Amber
LED's	13 x 5mm Diodes
Diameter	2.50"
Depth	2.50"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	100 Milliamps
Legal Heading	P2
Mounting	Grommet
Connector	PL - 2



13 LED's

M11201Y

- 100,000 Hour Rated LED Life
- Poly-Carbonate Lens and Housing
- Fits Standard Mounting Holes, Grommets and Connectors

VANTAGE 2" ROUND CLEARANCE MARKER



M34260YCL



M34260RCL



M34260Y



M34260R

6 LED's

PRODUCT SPECS

Part Number	M34260R Red M34260Y Amber M34260RCL Red Clear Lens M34260YCL Amber Clear Lens
LED's	6 x 5mm Diodes
Diameter	2.00"
Depth	.69"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	40 Milliamps
Legal Heading	P2
Mounting	Grommet
Connector	PL - 2

- 5 Year Warranty
- New Circular LED Pattern
- Sealed Electronics
- Poly-Carbonate Lens and Housing
- Fits Standard Mounting Holes, Grommets and Connectors

VANTAGE 2 1/2" ROUND CLEARANCE MARKER



M16280Y

8 LED's



M16280R



M16280YCL



M16280RCL

PRODUCT SPECS

Part Number	M16280R Red M16280Y Amber M16280RCL Red Clear Lens M16280YCL Amber Clear Lens
LED's	8 x 5mm Diodes
Diameter	2.50"
Depth	.69"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	40 Milliamps
Legal Heading	P2
Mounting	Grommet
Connector	PL - 2

- 5 Year Warranty
- New Circular LED Pattern
- Sealed Electronics
- Poly-Carbonate Lens and Housing
- Fits Standard Mounting Holes, Grommets and Connectors

VANTAGE 2" BEEHIVE CLEARANCE MARKER



6 LED's

M34600R

- 5 Year Warranty
- New Circular LED Pattern
- Sealed Electronics
- Poly-Carbonate Lens and Housing
- Fits Standard Mounting Holes, Grommets and Connectors



M34600Y



M34600RCL



M34600YCL

PRODUCT SPECS

Part Number	M34600R Red M34600Y Amber M34600RCL Red Clear Lens M34600YCL Amber Clear Lens
LED's	6 x 5mm Diodes
Diameter	2.00"
Depth	1.75"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	40 Milliamps
Legal Heading	P2
Mounting	Grommet
Connector	PL - 2

VANTAGE 2 1/2" BEEHIVE CLEARANCE MARKER



M16800YCL



M16800RCL



M16800Y



8 LED's

M16800R

PRODUCT SPECS

Part Number	M16800R Red M16800Y Amber M16800RCL Red Clear Lens M16800YCL Amber Clear Lens
LED's	8 x 5mm Diodes
Diameter	2.50"
Depth	2.50"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	40 Milliamps
Legal Heading	P2
Mounting	Grommet
Connector	PL - 2

- 5 Year Warranty
- New Circular LED Pattern
- Sealed Electronics
- Poly-Carbonate Lens and Housing
- Fits Standard Mounting Holes, Grommets and Connectors

BUS/CAB TRIANGLE COMBINATION MARKER



M20311R



15 LED's

M20311Y

PRODUCT SPECS

Part Number	M20311R P2PC Red M20311Y P2PC Amber
LED's	15 x 5mm Diodes
Depth	3.25"
Height	1.80"
Width	2.5"
DOT/SAE	J592e
Voltage	12.8 VDC
Amp Draw	80 Milliamps
Legal Heading	P2PC
Connector	Bullet & Ring

- Meets P2PC Requirements for 45° Mounting
- Poly-Carbonate Lens
- Standard 1.50" Mounting Holes With Mounting Gasket
- 100,000 Hour Rated LED Life

7" ROUND S/T/T, PARK/FRONT & REAR TURN, WHITE BACK UP BUS LIGHTS




20 LED's

M90450



17 LED's

M90061R



M90081Y

- Surface Mount with Standard 4 Hole Mounting Pattern
- Mounting Gasket Included
- Poly-Carbonate Lens and Housing for Superior Light Distribution and Visibility
- Sealed Electronics are Moisture, Corrosion and Vibration Proof
- 100,000 Hour Rated LED Life
- Maxx-Shield Protective Polymer Coating
- Reflectorized Lens Red and Amber

PRODUCT SPECS

Part Number	M90061R Red STT M90081Y Amber Park/Front Turn M90450 White Back Up
LED's	17 x 8mm Diodes Red, Amber
LED's	20 x 5mm Diodes White
Diameter	7.00"
Depth	1.38"
DOT/SAE	J1395, J1398, J592e, J585e, J222, J593c
Voltage	12.8 VDC
Amp Draw	Red 290, Amber 280, White 250 Milliamps
Legal Heading	I6P2S2T2A Red, I6PA Amber, R White
Mounting	Surface - Standard 4 Hole
Connector	3 Wire Leads

VANTAGE 2" ROUND AMBER FRONT



M002PB

- 5 Year Warranty
- Highly Polished 18 Gauge Stainless Steel Housings
- Chrome Grommet Covers
- Pre-Wired OEM Connector for Easy Installation
- Fits *Peterbilt Models 378, 379 1987-2004



M002PBCL



M003PB

PRODUCT SPECS

Part Number M002PB (6) Vantage Amber Round M34260Y
 M002PBCL (6) Vantage Amber Round Clear Lens M34260YCL
 M003PB (8) Vantage Amber Round M34260Y

VANTAGE 2" BEEHIVE AMBER FRONT



M005PBCL



M005PB



M006PB

PRODUCT SPECS

Part Number M005PB (6) Vantage Amber Beehive M34600Y
 M005PBCL (6) Vantage Amber Beehive Clear Lens M34600YCL
 M006PB (8) Vantage Amber Beehive M34600Y

- 5 Year Warranty
- Highly Polished 18 Gauge Stainless Steel Housings
- Chrome Grommet Covers
- Pre-Wired OEM Connector for Easy Installation
- Fits Peterbilt Models 378, 379 1987-2004

AMBER FRONT CHROME OVALS



M009PB



M009PBCL



M0010PB

PRODUCT SPECS

Part Number M009PB (8) Chrome Mini-Oval Amber M36180Y
 M009PBCL (8) Chrome Mini-Oval Amber Clear Leans M36180YCL
 M0010PB (6) Front Chrome Mini-Oval Amber M36180Y

RED REAR ASSEMBLIES



M0019PBCL



M0018PB



M0012PB



M0011PB

PRODUCT SPECS

- Part Number M0011PB (6) Rear Chrome Mini-Oval Red M36180R
 M0012PB (8) 2" Round M34260R
 M0018PB (8) Chrome Mini Oval M36180R
 M0019PBCL (8) Chrome Mini-Oval Clear Lens M36180RCL
 M0020PB (6) Round M34260R
 M0020PBCL (6) Round Clear Lens M34260RCL

- Highly Polished 18 Gauge Stainless Steel Housing
- Chrome Grommet Covers
- Pre-Wired OEM Connector for Easy Installation
- Fits Peterbilt Models 378, 379 1987-2004
- 5 Year Warranty

FRONT & REAR BLANK STAINLESS STEEL AIR CLEANER PANELS



M08BR

- Highly Polished 18 Gauge Stainless Steel Housing
- One Year Warranty Panel Only



M06BR

PRODUCT SPECS

- Part Number M06BF (6) Front Blank Stainless Steel Panel (Not Shown)
 M06BR (6) Rear Blank Stainless Steel Panel
 M08BF (8) Front Blank Stainless Steel Panel (Not Shown)
 M08BR (8) Rear Blank Stainless Steel Panel

WIRE HARNESS KITS



M50950-06

PRODUCT SPECS

- Part Number M50950-06 (6) Hole Wire Harness
 M50950-08 (8) Hole Wire Harness



M50950-08

- 6 & 8 Hole Wire Harness Kits With OEM Connector
- One Year Retail Warranty

LED WHITE PROJECTOR LIGHT



14 LED's

PLB-625

- 14 White LED's
- Poly-Carbonate Lens
- Stainless Steel Mounting Bracket
- Black Housing

PRODUCT SPECS

Part Number	PLB-625 White
LED's	14 x 5mm Diodes
Width	5"
Height	1.75"
Depth	2.63"
Voltage	12.8 VDC
Amp Draw	170 Milliamps
Connector	2 wires w/male pins

LED PROJECTOR LIGHT



PLB-630MBR



PLB-630BL



3 LED's

PLB-630

PRODUCT SPECS

Part Number	PLB-630 White PLB-630BL Blue PLB-630MBR Amber	Height	1.38"
LED's	3 x 1 Watt Diodes	Depth	1.38"
Width	4.375"	Voltage	12.8 VDC
		Amp Draw	210 Milliamps
		Connector	2 Wires

- 3 x 1 Watt LED's
- Poly-Carbonate Lens
- Stainless Steel Mounting Bracket
- Black Housing

CHROME MICRO INTERIOR COURTESY LIGHTS



LCL-3PUR

LCL-3RWB

- Interior Use Only
- Surface Mount
- 100,000 Hour Rated LED Life



LCL-3R



LCL-3BL



LCL-3MBR



LCL-3CL

PRODUCT SPECS

Part Number	LCL-3CL White LCL-3BL Blue LCL-3PUR Purple LCL-3MBR Amber LCL-3R Red LCL-3RWB Red, White & Blue LCL-3RWB-03 Triple Pack	LED's	3 x 5mm Diodes
		Width	1.06"
		Height	.94"
		Depth	.44"
		Voltage	12.8 VDC
		Amp Draw	20 Milliamps
		Mounting	2 Holes

STAINLESS STEEL BEZEL COURTESY LIGHTS



LED-300MBR



LED-300CL



LED-300PUR



LED-300BL



LED-300R

3 LED's

PRODUCT SPECS

Part Number	LED-300CL White LED-300BL Blue LED-300PUR Purple LED-300MBR Amber LED-300R Red
LED's	3 x 5mm Diodes
Width	2.69"
Height	1.25"
Depth	.63"
Voltage	12.8 VDC
Amp Draw	30 Milliamps
Mounting	2 Holes

- Easy Snap-On Stainless Steel Bezel
- Surface Mount
- One Piece Sealed Electronics
- 100,000 Hour Rated LED Life

FLANGED COURTESY LIGHTS



LED-963CL

9 LED's

- Sealed Waterproof Electronics
- 3 Hole Flush Mount
- Poly-Carbonate Lens and Housing
- 100,000 Hour Rated LED Life



LED-963MBR

PRODUCT SPECS

Part Number	LED-963CL White LED-963MBR Amber
Accessories	R963BLK Black Snap-On Bezel R963CH Chrome Snap-On Bezel R963WH White Snap-On Bezel
LED's	9 x 5mm Diodes
Diameter	3.50"
Depth	1.13"
Voltage	12.8 VDC
Amp Draw	45 Milliamps
Mounting	Flange

2 1/2" ROUND WHITE INTERIOR COURTESY LIGHT



13 LED's

M11300WCL

- Poly-Carbonate Lens
- Solid State Circuit Board
- Fits Standard Mounting Holes & Grommets
- Moisture, Vibration and Corrosion Proof
- 100,000 Hour Rated LED Life
- Grommet Mount

PRODUCT SPECS

Part Number	M11300WCL
LED's	13 x 5mm Diodes
Diameter	2.50"
Depth	.69"
Voltage	12.8 VDC
Amp Draw	90 Milliamps
Connector	PL - 2

COMPACT COURTESY LIGHTS



LED-09CH-MBR



LED-09CH-CL



LED-09B-CL



PRODUCT SPECS

Part Number	LED-09B-CL Black Finish White LED's LED-09B-MBR Black Finish Amber LED's LED-09CH-CL Chrome Body White LED's LED-09CH-MBR Chrome Body Amber LED's
LED's	4 x 5mm Diodes
Width	2.66"
Height	1.75"
Depth	1.25"
Voltage	12.8 VDC
Amp Draw	40 Milliamps
Mounting	Flush Mount

4 LED's

LED-09B-MBR

- Removable Poly-Carbonate Lens for Easy Mounting
- Solid State Circuit Board
- Two Stainless Steel Mounting Screws Included
- 100,000 Hour Rated LED Life

INTERIOR FLIP LIGHT

PRODUCT SPECS

Part Number	LED-063CL
LED	1 Power LED
Height	2.1"
Depth	1.15"
Voltage	12.8 VDC
Amp Draw	40 Milliamps
Mounting	2 Screws
Connector	Plated Terminals



1 LED

LED-063CL

- Switch built into lens for easy operation
- Eliminates installation of wall switch
- Hole Cut-Out: 3.13" W x 1" H x 1" D

CHROME MINI-OVAL WHITE INTERIOR COURTESY

U.S. Patent No. 514008



7 LED's

M36180WCL

- 100,000 Hour Rated LED Life

PRODUCT SPECS

Part Number	M36180WCL
LED's	7 x 5mm Diodes
Width	3"
Height	2"
Depth	.63"
Voltage	12.8 VDC
Amp Draw	40 Milliamps
Mounting	Surface
Connector	PL - 2

CHROME OVAL WHITE INTERIOR COURTESY

U.S. Patent No. 514008



13 LED's

M72270WCL

- Easy Snap-On Stainless Steel Bezel

PRODUCT SPECS

Part Number	M72270WCL
LED's	13 x 5mm Diodes
Width	6.4"
Height	1.9"
Depth	0.9"
Voltage	12.8 VDC
Amp Draw	60 Milliamps
Mounting	Surface
Connector	PL - 2

RECTANGULAR SURFACE MOUNT COURTESY LIGHT



10 LED's


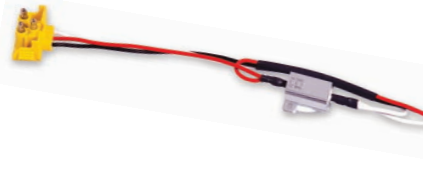


M42205WCL

- 2 Hole Surface Mount
- Poly-Carbonate Lens & Housing
- Solid State Circuit Board

PRODUCT SPECS

Part Number	M42205WCL
LED's	10 x 5mm Diodes
Width	4.6"
Height	2.4"
Depth	1.0"
Voltage	12.8 VDC
Amp Draw	100 Milliamps
Mounting	Surface
Connector	PL - 2

<p>3-PIN RIGHT ANGLE STT</p>   <p>M50900-X</p> <p>M50900</p>	<p>3-PIN MALE/FEMALE EXTENSION HARNESS</p>  <p>M50901</p>	<p>3-PIN MALE TO MALE ADAPTER WEATHER PACK TO PL-3</p>  <p>M50903</p>
--	---	--

<p>3-PIN MALE TO MALE *GROTE ADAPTER HARNESS</p>  <p>M50904</p>	<p>3-PIN RIGHT ANGLE LOAD EQUALIZER FOR USE WITH STANDARD INCANDESCENT FLASHER MODULE</p>  <p>M50905</p>	<p>2-PIN RIGHT ANGLE CM</p>   <p>M50950-X</p> <p>M50950</p>
--	--	---

<p>2-PIN RIGHT ANGLE CM 2 MALE .180 BULLET CONNECTORS</p>  <p>M50951</p>	<p>MBP-12V BATTERY TEST PACK</p>  <p>MBP-12V</p>	<p>3-PIN LED FLASHER 240FPM CONVERT YOUR LEDS INTO STROBE LIGHTS</p>  <p>PF-240</p>
---	--	--

CONTINUOUS WIRE HARNESSES



<p>3-PIN 12" LEAD 100 CONNECTORS PER ROLL</p>  <p>M50900-100</p>	<p>2-PIN 6" LEAD 200 CONNECTORS PER ROLL</p>  <p>M50950-200</p>	<p>2-PIN 12" LEAD 100 CONNECTORS PER ROLL</p>  <p>M50950-100</p>	<p>2-PIN 30" LEAD 40 CONNECTORS PER ROLL</p>  <p>M50950-40</p>	<p>2-PIN 24" LEAD 50 CONNECTORS PER ROLL</p>  <p>M50950-50</p>
---	--	---	--	---

* Grote is a Registered Trademark of Grote Industries.

BLACK VINYL GROMMETS

CHROME PLASTIC GROMMET COVERS

SECURITY FLANGES/BRUSH GUARDS/BEZELS



PERSONAL FLAT LED FLASHLIGHTS

U.S. Patent No. D539,456 S



MF-16 White



MF-17 Red



MF-18 Blue

5 LED's

- Personal Compact Sleek Design
- Ergonomic Designed On/Off Switch
- Wall Mount & Desk Top Pedestal Included
- Uses 3 AAA Batteries - Not Included
- ABS Material
- One Year Retail Warranty
- Battery Duration 100 Hours Plus

PRODUCT SPECS

Part Number	MF-16 White
	MF-17 Red
	MF-18 Blue
LED's	5 x 5mm Diodes
Batteries	3 AAA

COMPACT FLASHLIGHTS



MF-37R



MF-36A



MF-31A



MF-30A

6 LED's

PRODUCT SPECS

Part Number	MF-30A White LED's
	MF-31A Blue LED's
	MF-36A White LED's
	MF-37R Red LED's
LED's	6 x 5mm Diodes
Length	3.75"
Diameter	1.5"
Batteries	4 AAA

- New Compact Design
- Precision Aluminum Extrusion
- Uses 4 AAA Batteries - Not Included
- ON/OFF Push Switch
- Battery Duration 100 Hours Plus
- Includes Carry Holster
- One Year Retail Warranty

SLIM FLASHLIGHT



5 LED's

MF-26

PRODUCT SPECS

Part Number	MF-26
LED's	5 x 5mm Diodes
Length	8"
Diameter	1"
Batteries	3 AA

- New Compact Slim Design
- Precision Tooled Aluminum Extrusion
- Sealed On/Off Switch
- Battery Duration 100 Hours Plus
- Uses 3 AA Batteries - Not Included
- One Year Retail Warranty

GORILLA® HEAVY DUTY FLASHLIGHTS



24 LED's

MGF-120R

MGF-124

- Heavy Duty Aluminum Construction
- On/Off Switch
- 75+ Hours Operation
- Uses 3 D Batteries - Not Included
- One Year Retail Warranty
- Low Battery Indicator

PRODUCT SPECS

Part Number	MGF-120R Red Housing MGF-124 Black Housing
LED's	24 x 5mm Diodes
Length	9.5"
Diameter	2.25"
Batteries	3 D Cell

OCCUPANCY SENSOR LIGHTS



1 LED

MLS-01



MLS-03B

3 LED's



MLS-03



5 LED's

MLS-05W



MLS-05B

2 LED's



MLS-10

- Auto On Off Motion Sensor
- 20ft+ Motion Range
- 100° Sensor Range
- 4 AA Batteries - Not Included
- Battery Life 1-2 Years in Auto Mode
- 100,000 Hour Rated LED Life
- One Year Retail Warranty

PRODUCT SPECS

Part Number	MLS-01, 1 LED White Body
	MLS-03 3 LED White Body White,
	MLS-03B 3 LED Black Body
	MLS-05W 5 LED White Body
	MLS-05B 5 LED Black Body
	MLS-10, 2 LED
	AC/DC Operation

LED FLAMELESS CANDLE

PRODUCT SPECS

Part Number	MLC-01
Batteries	2 AAA

- 2 Flickering LED Votive Candles
- LED Flickers Like Real Candle
- On/Off Switch
- Uses 2 AAA (not included)
- No Fire Hazard
- Safe for Use in Establishments That Do Not Allow Open Flames



1 LED

MLC-01 (Twin Pack)



MLN-10



MLN-09



Patent Pending

1 LED

MLN-18

PRODUCT SPECS

Part Number	MLN-09 MLN-10 MLN-18-01 Single Pack MLN-18-02 Twin Pack
Voltage	120 VAC
Mounting	Outlet Plug-In



- 100,000 Hour Rated LED
- Auto On-Off Dusk to Dawn Sensor
- Save On Energy Costs
- UL Approved
- One Year Retail Warranty

DUSK TO DAWN NIGHT LIGHTS



2 LED's

MLN-15WL

- Auto On-Off Dusk to Dawn Sensor
- 120 VAC
- 100,000 Hour Rated LED
- Save On Energy Costs
- UL Approved
- One Year Retail Warranty



MLN-15CL



MLN-11

PRODUCT SPECS

Part Number	MLN-15CL-01 Clear Lens Single Pack MLN-15CL-02 Clear Lens Twin Pack MLN-15WL-01 White Lens Single Pack MLN-15WL-02 White Lens Twin Pack MLN-11-01 Single Pack MLN-11-02 Twin Pack
Voltage	120 VAC
Mounting	Outlet Plug-In



MAXXIMA LARGE
BLACK TRAVEL BAG



MB-90

MAXXIMA JACKET



MJ-001

DENIM SHIRT



MS-007

MAXXIMA BASEBALL
CAP / WHITE



MCAP-WH

MAXXIMA BASEBALL
CAP / NAVY BLUE



MCAP-NB

MAXXIMA VINYL DISPLAY BANNER



MAXXIMA BANNER

MAXXIMA WALL CLOCK



MWC-1

MAXXIMA HAND TOOL KIT



HTK-1

MAXXIMA GOLF SHIRTS



MS-005

MS-006

LIMITED WARRANTY & REPLACEMENT PROGRAM

LIMITED WARRANTIES AND PROCEDURES

Maxxima extends a Limited Warranty to the original purchaser that the products listed are free from defects in materials and/or workmanship only. Maxxima will replace any warranted product to the original consumer/purchaser if the product fails because of defects due to workmanship and/or materials within the Limited Warranty period. Limited Warranty is not transferable and applies to the original installation of the Maxxima product. This offer does not constitute in any way a product guarantee and Maxxima does not hereby assume any obligation whatsoever beyond sending a free replacement product.

LED LIMITED WARRANTY

Maxxima extends a Limited Warranty to the original purchaser that the Maxxima sealed LED lamp is free from defects in workmanship and materials only. Maxxima will replace any sealed LED lamp to the original consumer/purchaser if the lamp fails due to workmanship or materials. The Limited Warranty does not apply to severe applications such as construction equipment and off-road vehicles. These examples are not all inclusive of such excluded applications. Corrosive chemicals, agents, petroleum products, and harsh cleaners are incompatible with Maxxima sealed LED lamps and their use with Maxxima sealed LED lamps will void this Limited Warranty. The LED Limited Warranty does not apply to damage associated with these products.

The Limited Warranty is not transferable and applies to the original installation of the Maxxima LED lamp for ten (10) years from the manufacturing date. Standard internal multi-pin connector integral to the lamp is covered by a five (5) year Limited Warranty.

MAXXIMA LIGHTNING, GORILLA & VANTAGE SERIES

Lightning, Gorilla & Vantage Series Lights carry a five (5) year Limited Warranty.

MISUSE & IMPROPER WIRING OR GROUNDING

Maxxima LED vehicle lights are designed to operate in standard/normal application Stop/Tail/Turn, Park/Turn and Clearance Marker modes only. Any attempt to rewire the lights to operate on the bright side, Stop or Turn mode, for prolonged use will result in overheating and damage to the product and will void this Limited Warranty. Likewise, failure to properly ground the Maxxima LED vehicle lights, improperly wiring such lights or any other misuse, abuse or unauthorized use of Maxxima products will void this Limited Warranty. Maxxima lighting is only recommended for use as originally intended by the vehicle manufacturer.

NON-VEHICLE LIGHTING

All other non-vehicle Maxxima products are covered by a standard one (1) year Limited Warranty from date of original purchase. Under no circumstances will Maxxima be liable for incidental, Consequential or punitive damages whether or not the product is covered by this Limited Warranty.

PRODUCT REPLACEMENT INSTRUCTIONS

Please contact the Maxxima Sales Representative in your area or call Maxxima / Panor Corp. customer service at (631) 434-1200 extension 11, or fax to (631) 434-1457 for instructions and or a Returns Goods Authorization (RGA) number. Field scrap with full credit or product replacement at Maxxima's option. Products returned must be shipped freight prepaid with the RGA number clearly marked on the outside of the carton.



PART NUMBER	PAGE
HDI-DISP-4	IBC
HDI-DISP-5	IBC
HDI-DISP-6	IBC
HDI-DISP-10	IBC
HTK-1	46
LCL-3BL	36
LCL-3CL	36
LCL-3MBR	36
LCL-3PUR	36
LCL-3R	36
LCL-3RWB	36
LED-063CL	39
LED-09B-CL	38
LED-09B-MBR	38
LED-09CH-CL	38
LED-09CH-MBR	38
LED-300BL	37
LED-300CL	37
LED-300MBR	37
LED-300PUR	37
LED-300R	37
LED-963CL	37
LED-963MBR	37
M002PB	34
M002PBCL	34
M003PB	34
M005PB	34
M005PBCL	34
M006PB	34
M009PB	34
M009PBCL	34
M0010PB	34
M0011PB	35
M0012PB	35
M0018PB	35
M0019PBCL	35
M0020PB	35
M0020PBCL	35
M06BF	35
M06BR	35
M08BF	35
M08BR	35
M09100R	28
M09100RCL	28
M09100Y	28
M09100YCL	28
M09105R	30
M09105Y	30
M09250RCL-X	27
M09250R-X	27
M09250YCL-X	27
M11201R	30
M11201Y	30
M11256R	29
M11256Y	29
M11260R	26
M11260Y	26
M11300R	28
M11300RCL	28
M11300WCL	38
M11300Y	28
M11300YCL	28
M11350RCL-X	27
M11350R-X	27
M11350YCL-X	27
M16100R	15
M16100Y	15
M16280R	31
M16280RCL	31
M16280Y	31
M16280YCL	31
M16800R	32
M16800RCL	32
M16800Y	32
M16800YCL	32
M20311R	33
M20311Y	33

PART NUMBER	PAGE
M20320R	24
M20320Y	24
M20321R	23
M20321Y	23
M20323R	25
M20325	24
M20326	24
M20327	24
M20328	24
M20330R	23
M20330Y	23
M20332R	20
M20332RCL	20
M20332Y	20
M20332YCL	20
M20340R	24
M20340RCL	24
M20340Y	24
M20340YCL	24
M20343R	25
M20343RCL	25
M20343Y	25
M20350R	24
M20350RCL	24
M20350Y	24
M20350YCL	24
M20355	24
M20356	24
M20357	24
M20358	24
M20361R	23
M20361RCL	23
M20361Y	23
M20361YCL	23
M20370BCL	16
M20370RCL	16
M20370YCL	16
M20370W	16
M20391R	22
M20391Y	22
M20395R	22
M20395Y	22
M23015R	26
M23015R-5	25
M23015RCL	26
M23015Y	26
M23015YCL	26
M27005R	20
M27005RCL	20
M27005Y	20
M27005YCL	20
M27340R	29
M27340Y	29
M34100R	15
M34100Y	15
M34260R	31
M34260RCL	31
M34260Y	31
M34260YCL	31
M34600R	32
M34600RCL	32
M34600Y	32
M34600YCL	32
M36180R	21
M36180RCL	21
M36180WCL	39
M36180Y	21
M36180YCL	21
M42100R	9
M42100Y	9
M42120R	9
M42201R	13
M42201Y	13
M42205	8
M42205R	13
M42205WCL	39
M42205Y	13

PART NUMBER	PAGE
M42210R	17
M42210Y	17
M42211	8
M42220	11
M42320R	10
M42322R	4
M42322RCL	4
M42322Y	4
M42322YCL	4
M42323R	4
M42323RCL	4
M42324	6
M42325	7
M42326	6
M42327	7
M42328R	19
M42328R/Y	19
M42328RYCL	19
M42328Y	19
M42330R/Y	18
M42331R/Y	18
M42332R/Y	18
M42332RYCL	18
M42333R/Y	18
M42400	7
M42450	7
M42500R	14
M42500Y	14
M42700R	16
M42700Y	16
M42705Y	17
M43253	41
M43253CH	41
M43900	41
M49700	41
M49702	41
M49705	41
M50100-B	41
M50102	41
M50103	41
M50105	41
M50300-B	41
M50303	41
M50305	41
M50310	41
M50311	41
M50312	41
M50400-B	41
M50405	41
M50410	41
M50600-B	41
M50605	41
M50900	40
M50900-X	40
M50900-100	40
M50901	40
M50903	40
M50904	40
M50905	40
M50950	40
M50950-X	40
M50950-06	35
M50950-08	35
M50950-40	40
M50950-50	40
M50950-100	40
M50950-200	40
M50951	40
M56100R	10
M63100R	12
M63100Y	12
M63120Y	11
M63150	7
M63200R	16
M63200Y	16
M63253	41
M63253CH	41

PART NUMBER	PAGE
M63254	41
M63322R	5
M63322RCL	5
M63322Y	5
M63322YCL	5
M63323R	5
M63323RCL	5
M63323Y	5
M63324	6
M63325	6
M63420R	12
M63420Y	12
M63450R	14
M63450Y	14
M72270R	21
M72270RCL	21
M72270WCL	39
M72270Y	21
M72270YCL	21
M85429R	3
M85429Y	3
M85639R	3
M85639Y	3
M90061R	33
M90081Y	33
M90450	8 + 33
Maxxima Banner	46
MB-90	46
MBP-12V	40
MCAPNB	46
MCAPWH	46
MF-16	42
MF-17	42
MF-18	42
MF-26	43
MF-30A	42
MF-31A	42
MF-36A	42
MF-37R	42
MGF-120R	43
MGF-124	43
MJ-001	46
MLC-01	44
MLN-09	45
MLN-10	45
MLN-11-01	45
MLN-11-02	45
MLN-15CL-01	45
MLN-15CL-02	45
MLN-15WL-01	45
MLN-15WL-02	45
MLN-18-01	45
MLN-18-02	45
MLS-01	44
MLS-03	44
MLS-03B	44
MLS-05W	44
MLS-05B	44
MLS-10	44
MMK-100	IBC
MS-005	46
MS-006	46
MS-007	46
MWC-1	46
PF-240	40
PLB-625	36
PLB-630	36
PLB-630BL	36
PLB-630MBR	36
R963BLK	31
R963CH	31
R963WH	31
SDL-30	17
SDL-33	17
SDL-50	17
SDL-52	17
SDL-53	17

GIANT LED DISPLAY



Height 41"
Width 32"

HDI-DISP-10

MAXXIMA WHITE METAL RETAIL DISPLAY ONLY



MMK-100

LED STT DISPLAY



HDI-DIS-4

LED CM DISPLAY



HDI-DIS-5

LED HYBRID DISPLAY



HDI-DIS-6



 **Maxxima**[®]

125 CABOT CT. HAUPPAUGE, NY 11788 USA | TEL: 631.434.1200 FAX: 631.952.0349
www.maxxima.com info@maxxima.com