



Driver Net Installation Instructions

11-05

The Safety Solutions Driver Nets are an integral part of any good safety system. They are constructed of the best materials available and have been tested on hyge sleds to insure they will perform when called upon. Unlike other manufactures nets, the safety solutions nets are made from either Polyester or Kevlar materials to help them reduce the amount of head movement into the net.

Installation:

The driver nets are designed to reinforce the headrest and shoulder in the seat system when present or to contain the occupant in the seat system when no headrest or shoulder is used in the occupant safety system. In angular impacts, the nets are designed to catch and guide the head in both the forward motion and in the return motion to help the head get back into the seat system instead of in-back of the headrest.

The location of the net is important to its proper operation. The front point of the net needs to be located about shoulder or dash level in the car. All anchor points must be able to withstand a minimum of 2,000 lbs of force. All anchor points should include a provision to stop any sliding action of the strap when the net is loaded.

In a banner style net (C5R, Rally or Viper, etc.) the upper strap needs to be located such that it passes through the centerline of the drivers head when seated in the race car in a normal driving condition.



T. S. Nextel Cup Car



Net Sled Test 2001 – 50 G impact



Rally Net Test w/ LFT Technologies R3 – Note Location of upper strap through cg of the head.

The nets are designed to be right and left handed. The net vertical straps are located away from the occupant and the red release strap is located to the bottom side of the net. This provides the smoothest surface for the occupant's head to glide on, while insuring an easy grab to the quick release red tether.

The net should be anchored at the back wrapping the seat system as much as possible and as close as possible to the drivers head. The greater the distance between the driver's head and the net, the less effective the net will be in lowering the impact forces. This is because the driver will have a greater distance to build up speed before contacting the net.

While looking front to back in the car, the net should be mounted as straight up as possible. As the net becomes more tilted inward toward the driver, the more the occupant will be forced down by the upper strap, causing greater neck compressive forces.


Installation into the vehicle:

After determining the proper mounts for the nets, lace the nets to the anchor points with the webbing through only one of the bars of the 3-bar adjusters. This will allow you to easily adjust the tension on the net to get the net smooth and even. This part of the installation is the most tedious, but most essential part.

The tension mechanism, ratchet or over-center mechanism, can be used on the front point of the net, (most common) or either the upper or lower rear strap of the triangle. The placement is a matter of convenience and room. The nets are generally supplied with the front D-ring and webbing attached to a ratchet. This is the most common set-up. If the ratchet is to be transferred to one of the rear straps, the black 3-bar adjuster used on the new tension strap must be transferred to the front d-ring mount.

Use the front quick release to provide most of the tension on the net. **The proper tension on the net is determined by the amount of force applied to release the quick release at the front of the net. Since this is the escape route in most cars, the driver needs to be able to release the net before exiting the car.**

When the proper tension has been achieved for the net system, always insure that the metal 3-bar adjusters have been locked down by weaving the webbing material back through the 3-bar a third time. (When properly locked down, only one side of the 3-bar will be visible.) Trim all excess webbing after the 3-bar adjusters approximately 2-3 inches beyond the adjuster or tie wrap the excess down.

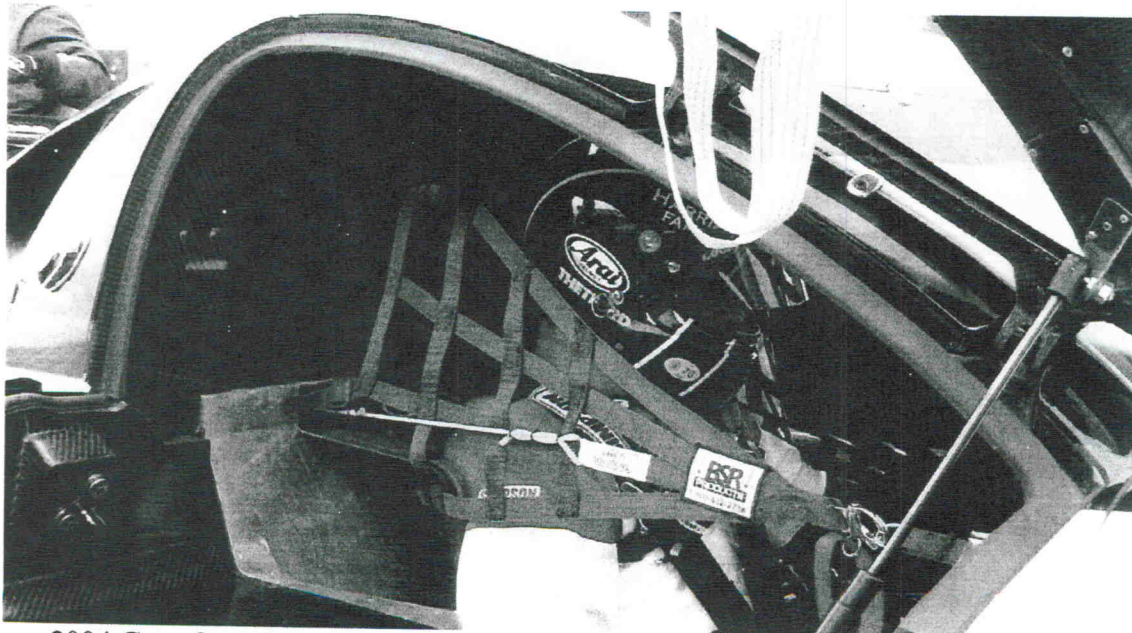

2004 Crawford Grand Am Prototype



DISCLAIMER

Vehicle racing is inherently a dangerous sport with significant risk of person injury or even death. When a user participates in vehicle racing, he accepts the risk inherent therein. Simpson Performance, Inc. makes no warranty that the use of its products or parts guarantees personal safety or freedom from physical injury or operates as a life saving device.

SIMPSON PERFORMANCE, INC.'S PRODUCTS AND PARTS ARE SOLD "AS IS" WITHOUT ANY WARRANTY WHATSOEVER. EXPRESS WARRANTIES, IMPLIED WARRANTIES, WARRANTIES OF MERCHANTABILITY AND WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE ARE EXCLUDED. THE ENTIRE RISK OF QUALITY AND PERFORMANCE OF SUCH PRODUCTS AND PARTS IS WITH THE BUYER, USER SUBSEQUENT USER, OR AGENT THEREOF (HEREIN "USER"). SHOULD SUCH PRODUCTS OR PARTS PROVE DEFECTIVE FOLLOWING THEIR PURCHASE, THE BUYER AND NOT THE MANUFACTURE(S), DISTRIBUTOR(S), OR RETAILER(S), ASSUME THE ENTIRE COST OF ALL NECESSARY SERVICES OR REPAIR.

Simpson Performance, Inc. disclaims all liability for any special, direct, incidental or consequential damages, or any damages whatsoever, including, without limitation, the loss of life or limb, or damages due to bodily or personal injury, which may arise or result from the sale, installation, or use of any of its products and parts.

It is the user's responsibility to inspect and verify the dimensions, specifications, and performance of all products and parts as being appropriate for the use to which the user will put them prior to any actual installation and/or use of said products and parts.

Simpson Performance, Inc.'s products and parts are to be inspected by the user before each use for evidence of damage, defect, or wear. Any deviation by the user from the manufacturer's specifications concerning use, maintenance, repair, alterations and modifications constitutes willful negligence.

The installation of Simpson Performance, Inc.'s products or parts may adversely affect other vehicle components, safety equipment or manufactured goods (collectively "goods"). Simpson Performance, Inc. assumes no responsibility for any damage to other goods, or bodily injury that may arise due to failure of other goods, due to installation and/or use, either proper or improper, of its products or parts.

The liability of Simpson Performance, Inc. is limited to the replacement of defective products or parts found under examination by manufacturer to be defective in material or workmanship within 60 days after purchase, and which has not been caused by an accident, improper use, alteration, tampering, excessive use, misuse, modification or abuse. The damage of the user shall be deemed liquidated in the costs of replacement of the product or part.

Simpson Performance, Inc. assumes no responsibility for errors, omissions, diagrams, pictures, illustrations or text in these instructions or the documents contained herewith.

By purchasing or using this product, the user agrees that if any provision of this Disclaimer is held to be illegal, invalid or unenforceable under present or future law, such provision shall be fully severed from the Disclaimer and this Disclaimer shall be construed and enforced as if such illegal, invalid or unenforceable provision never comprised a part hereof, and the remaining provisions hereof shall remain in full force and effect and shall not be affected by the illegal, invalid, or unenforceable provision, there shall be added automatically as part of this Disclaimer a provision as similar in its terms to such illegal, invalid or unenforceable provision as may be possible and be legal, valid and enforceable.